OSAKA 350 **7412** SKU 1061006

astro



PRODUCT SPECIFICATION

GENERAL

FINISH: Polished Chrome CABLE LENGTH: Not Applicable MAIN MATERIAL: Metal - Mild Steel **GROSS WEIGHT:** 1.84 (kg) D: 109mm Ø: 350mm DIMENSIONS: CLASS: CE (Class II) INSTALLATION ORIENTATION: Ceiling Mount IP RATING: IP44 **CUT OUT HOLE:** Not Applicable **BATHROOM ZONE:** Zone 2, 3 **RECESS DEPTH:** Not Applicable **VOLTAGE:** Mains 230V FIRE RATING: Not Applicable PRODUCT F MARK: Not Applicable

LAMP

LIGHT SOURCE: LED Strip MACADAM ELIPSE: 7-Step UGR: MAXIMUM WATTAGE: 22.4W Not Applicable MAXIMUM LAMP LENGTH: Not Applicable **BEAM ANGLE:** Not Applicable LAMP INCLUDED? Yes (Integral) TILT ADJUSTMENT ANGLE: Not Applicable **LUMINOUS FLUX:** 1316 (lm) **ROTATION ADJUSTMENT ANGLE:** Not Applicable **COLOUR TEMP:** AVERAGE LIFESPAN: 3000 (K) To Be Advised CRI: 80 L70: To Be Advised R9: 16

ELECTRICAL


SWITCHED: No SUPPLY FREQUENCY: 50/60 (Hz) DIMMABLE: No DRIVER/BALLAST VOLTAGE: 100-240 (V) DIMMING METHOD: Not Applicable DRIVER AVERAGE LIFESPAN: Not Applicable **DRIVER OUTPUT CURRENT:** 520 (mA) EFFICACY: 58.7 (lm/W) DRIVER OUTPUT VOLTAGE: DRIVER/BALLAST INCLUDED? Not Applicable Yes (Integral)


ADDITIONAL INFORMATION



BOX QUANTITY x 10

 ϵ

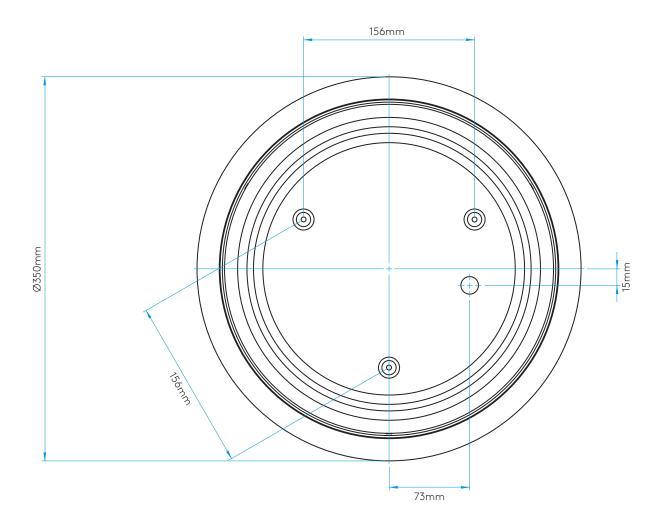

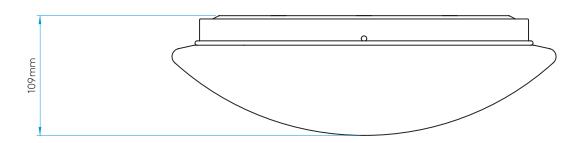

T: +44 (0) 1279 427001 sales@astrolighting.com www.astrolighting.com